

PITCHER PAVING DETAIL

CARRIAGEWAY PITCHERS TO BE LAID IN STRETCHER BOND PATTERN


3 PITCHER SPOON DRAIN

CUT BLUESTONE PITCHERS TO MATCH PROPERTY LINE

CUT BLUESTONE PITCHERS TO MATCH PROPERTY LINE

**NOTES:**

1. LIFT BLUESTONE PITCHERS & EXCAVATE TO REQUIRED DEPTH.
2. CLEAN & RESET BLUESTONE PITCHERS ON 25 MPa CONCRETE BASE AND 3% CEMENT TREATED CRUSHED ROCK SUB-BASE.
3. BLUESTONE JOINTS TO BE FILLED WITH A GROUT MIX OF: 16% CEMENT, 16% STONEDUST, 67% BLENDED WASHED SAND AND 1% LIME WITH BAYER SYNTHETIC COLOUR OXIDE ADDED AT A RATE OF 40 KG/M<sup>3</sup> THOROUGHLY MIXED THROUGH THE GROUT. (CHARCOAL COLOURED GROUT)
4. TYPICAL PITCHER SIZE OF 150MM X 200MM IS AN AVERAGE SIZE ONLY.
5. ALL GROUTED JOINTS TO BE A MAXIMUM OF 30mm WIDE TO FULL DEPTH OF PITCHER.
6. ALL EXCESS GROUT TO BE REMOVED FROM THE SURFACE OF THE BLUESTONE.
7. CONCRETE COMPRESSIVE STRENGTH SHALL BE 25 MPa AT 28 DAYS.
8. ALL DIMENSIONS ARE IN MILLIMETERS.

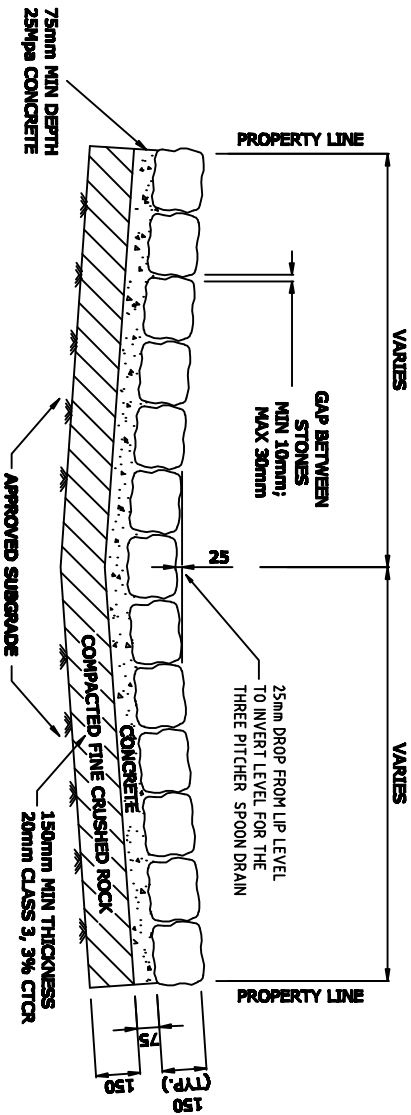

TYPICAL CROSS SECTION


NOTES:

E				
D	FINAL	NP	AN	02/04/19
C	FINAL	NP	AN	22/07/09
B	FINAL	NP	AN	24/04/08
A	FINAL	AA	LL	26/11/06

No. Description: Drawn: Checked: Date: REVISIONS:

DRAWN: NP  
 CHECKED: AN  
 AUTHORIZED: AN

DATE PLOTTED: DATE PLOTTED  
 SCALE: 1:25



DRAWING TITLE:  
 BLUESTONE PITCHER  
 RIGHT OF WAY  
 WITH CHANNEL

DWG. No. SD 3101  
 REVISION: D