


PITCHER PAVING DETAIL

NOTES:

1. LIFT BLUESTONE PITCHERS & EXCAVATE TO REQUIRED DEPTH.
2. CLEAN & RESET BLUESTONE PITCHERS ON 25 MPa CONCRETE BASE AND 3% CEMENT TREATED CRUSHED ROCK SUB-BASE.
3. BLUESTONE JOINTS TO BE FILLED WITH A GROUT MIX OF: 16% CEMENT, 16% STONEDUST, 67% BLENDED WASHED SAND AND 1% LIME WITH BAYER SYNTHETIC COLOUR OXIDE ADDED AT A RATE OF 40 KG/M³ THOROUGHLY MIXED THROUGH THE GROUT. (CHARCOAL COLOURED GROUT)
4. TYPICAL PITCHER SIZE OF 150MM X 200MM IS AN AVERAGE SIZE ONLY.
5. ALL GROUTED JOINTS TO BE A MAXIMUM OF 30mm WIDE TO FULL DEPTH OF PITCHER.
6. ALL EXCESS GROUT TO BE REMOVED FROM THE SURFACE OF THE BLUESTONE.
7. CONCRETE COMPRESSIVE STRENGTH SHALL BE 25 MPa AT 28 DAYS.
8. ALL DIMENSIONS ARE IN MILLIMETRES.

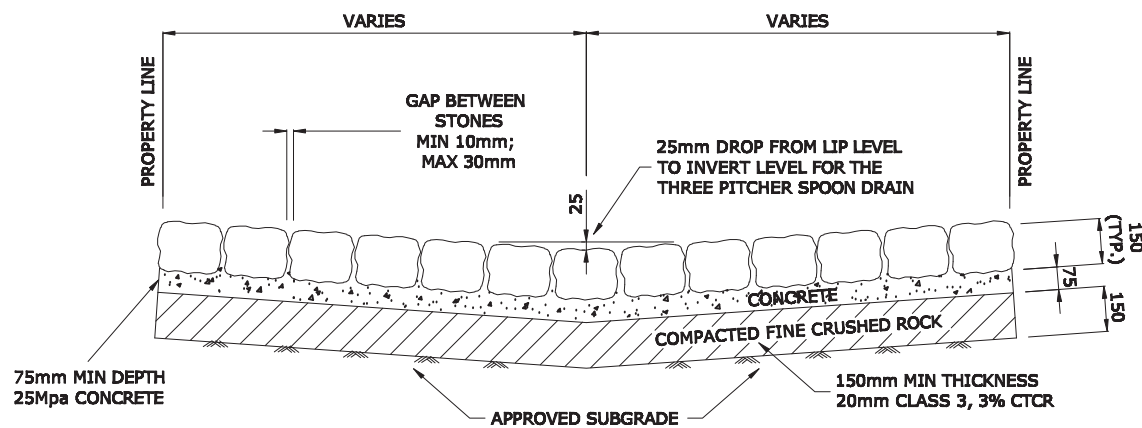

TYPICAL CROSS SECTION

NOTES:

F				
E	FINAL	TL	AN	05-07-11
D	FINAL	NP	AN	02/04/09
C	FINAL	NP	AN	22/01/09
B	FINAL	NP	AN	24/04/08
A	FINAL	AA	LL	26/11/06

No. Description: Drawn: Checked: Date:
 REVISIONS:

DRAWN:	NP
CHECKED:	AN
AUTHORISED:	AN

DATE PLOTTED:	DATE PLOTTED
SCALE:	1:25



DRAWING TITLE:
 BLUESTONE PITCHER
 RIGHT OF WAY
 WITH CHANNEL

DRG. No.	SD 3101	REVISION:	E
----------	---------	-----------	---